


2-WAY HOSE REEL WITHOUT HOSE

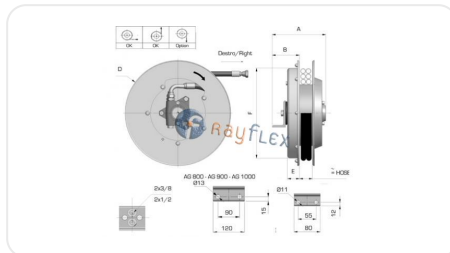

APPLICATIONS

Para Tubos: R7 - R8 - MT1 - MT2

FLOW RATE

40

WORKING PRESSURE

300

FOR HOSE (INCHES)

1/4 - 5/16 - 3/8

Code	A mm	B mm	D mm	E mm	F mm	L. tubo 1/4 m	L. tubo 5/16 m	L. tubo 3/8 m
GDA2D20006	133	65	200	30	195	1,5	-	-
GDA2D29510	160	75	295	35	272	4,7	4,2	3,6
GDA2D34010	160	82	340	37	272	6,0	5,3	4,6
GDA2D37010	161	82	370	37	272	6,0	5,3	4,5
GDA2D42010	161	82	420	47	322	8,6	8,0	6,7
GDA2D47010	161	82	478	47	322	11,5	10,0	9,5
GDA2D52010	171	92	520	47	422	14,5	12,5	11,2
GDA2D57010	171	92	570	47	422	17,5	15,5	13,5
GDA2D60010	171	92	620	47	422	21,0	17,0	16,0
GDA2D65010	181	102	650	57	422	22,5	19,5	17,5

The data provided is for guidance only and may be subject to changes or corrections without prior notice. Please contact us if you detect any errors or require further technical information. (Ficha generada el 02/04/2026 a las 00:32:23)