


# BSPB MALE-MALE

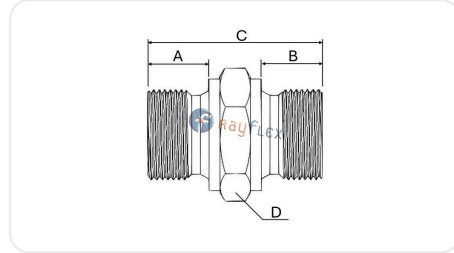

## MATERIAL

Acero Carbono (Zincado de Cromo Trivalente - Libre de Cr(VI) -)

## MAXIMUM TEMPERATURE

120

## MINIMUM TEMPERATURE

-40

Code	Rosca	Rosca	A mm	B mm	C mm	D mm
RB60180202	1/8	1/8	10,2	10,2	27,9	14
RB60180204	1/8	1/4	10,2	11	30,2	19
RB60180206	1/8	3/8	10,2	12,7	32,7	22
RB60180404	1/4	1/4	11	11	31,1	19
RB60180406	1/4	3/8	11	12,7	33,5	22
RB60180408	1/4	1/2	11	15,2	39,4	27
RB60180412	1/4	3/4	11	16	42,7	32
RB60180606	3/8	3/8	12,7	12,7	35,3	22
RB60180608	3/8	1/2	12,7	15,2	41,1	27
RB60180612	3/8	3/4	12,7	16	44,5	32
RB60180616	3/8	1"	12,7	19,1	47,5	41
RB60180808	1/2	1/2	15,2	15,2	43,2	27
RB60180810	1/2	5/8	15,2	16	44,5	30
RB60180812	1/2	3/4	15,2	16	47	32
RB60180816	1/2	1"	15,2	19,1	50,3	41
RB60180820	1/2	1"1/4	15,2	20,3	51,5	50

Code	Rosca	Rosca	A mm	B mm	C mm	D mm
RB60181010	5/8	5/8	16	16	45,2	30
RB60181012	5/8	3/4	16	16	47,6	32
RB60181212	3/4	3/4	16	16	47,6	32
RB60181216	3/4	1"	16	19,1	50,8	41
RB60181220	3/4	1"1/4	16	20,3	55	50
RB60181224	3/4	1"1/2	16	22,9	57	55
RB60181616	1"	1"	19,1	19,1	53,8	41
RB60181620	1"	1"1/4	19,1	20,3	58,7	50
RB60181624	1"	1"1/2	19,1	22,9	61,2	55
RB60181632	1"	2"	19,1	26	67	70
RB60182020	1"1/4	1"1/4	20,3	20,3	59	50
RB60182024	1"1/4	1"1/2	20,3	22,9	62,5	55
RB60182032	1"1/4	2"	20,3	26	68,4	70
RB60182424	1"1/2	1"1/2	22,9	22,9	60	55
RB60182432	1"1/2	2"	22,9	26	70,9	70
RB60183232	2"	2"	26	26	70,1	70
RB60183240	2"	2"1/2	24	25	64	75
RB60184040	2"1/2	2"1/2	25	25	72,2	75
RB60184048	2"1/2	3"	25	30	85,2	100
RB60184848	3"	3"	30	30	90,4	100

The data provided is for guidance only and may be subject to changes or corrections without prior notice. Please contact us if you detect any errors or require further technical information. (Ficha generada el 20/06/2026 a las 08:36:24)

Rayflex Sistemas y Fluidos S.A.  
 Pol. Ind. El Pla, C/Miquel Torelló i Pagès, 37-39, 08750 Molins de Rei, Barcelona  
 T. + 34 93 680 43 20 - info@rayflex.net

© Rayflex Todos los derechos reservados