
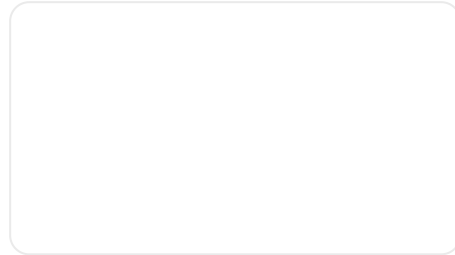


SWIVEL FEMALE METRIC 24° DKO LIGHT SERIES

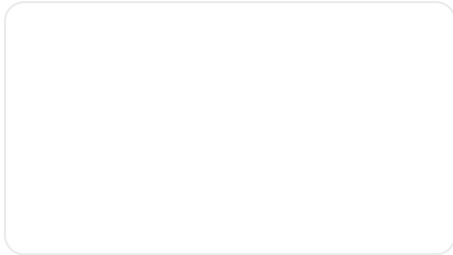

STANDARD

ISO 8434-1 / DIN 3865

MATERIAL

Acero carbono

NOTES

*- HG prensada

Code	Rosca	A mm	B mm	C mm	Ø manguera pulg.
RL10811203	12x150 6L	19.5	2	14	3/16
RL10811204	12x150 6L	20.9	2.6	16	1/4
RL10811404	14x150 8L	25	1.5	17	1/4
RL10811604	16x150 10L	27.5	1.5	19	1/4
RL10811605	16x150 10L	27.5	1.5	19	5/16
RL10811606	16x150 10L	23	3.5	19	3/8
RL10811804	18x150 12L	26	3.5	19	1/4
RL10811805	18x150 12L	26	1.5	22	5/16
RL10811806	18x150 12L	26	1.5	22	3/8
RL10811808	18x150 12L	22.7	1.6	24*	1/2
RL10812206	22x150 15L	28.5	3	27	3/8
RL10812208	22x150 15L	28.5	3.5	27	1/2
RL10812608	26x150 18L	30	2	32	1/2
RL10812610	26x150 18L	29	2	32	5/8
RL10813010	30x200 22L	29.4	3.5	36	5/8
RL10813012	30x200 22L	29.5	3.5	36	3/4

Code	Rosca	A mm	B mm	C mm	Ø manguera pulg.
RL10813616	36x200 28L	31.4	4.8	41	1"
RL10814516	45x200 35L	37	3	50	1"
RL10814520	45x200 35L	38.8	3.2	50	1"1/4
RL10815220	52x200 42L	48.2	3.8	60	1"1/4
RL10815224	52x200 42L	39.5	3	60	1"1/2

The data provided is for guidance only and may be subject to changes or corrections without prior notice. Please contact us if you detect any errors or require further technical information. (Ficha generada el 18/06/2026 a las 06:40:24)

Rayflex Sistemas y Fluidos S.A.
 Pol. Ind. El Pla, C/Miquel Torelló i Pagès, 37-39, 08750 Molins de Rei, Barcelona
 T. + 34 93 680 43 20 - info@rayflex.net

© Rayflex Todos los derechos reservados