


GAD HOSE

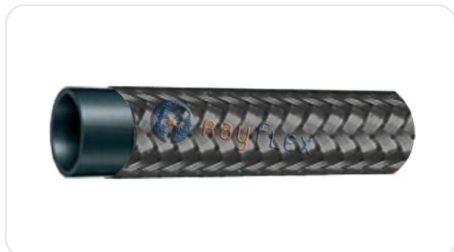

APPLICATIONS

Aceites, carburantes, gasoil, refrigerantes.

INTERNAL CORE

Caucho NBR sintético

MAXIMUM TEMPERATURE

90

STANDARD

DIN 73379

COVER

Trenza téxtil

MINIMUM TEMPERATURE

-20

Code	Galga	Ø int pulg	Ø int mm	Ø ext mm	P.trabajo bar	Protura bar	Rad. curv. mm	Peso kg/m
RT470307	2	1/8	3	7	20	80	15	0,04
RT470408		5/32	4	8	20	80	20	0,05
RT470511	3	3/16	5	11	20	80	25	0,08
RT470612	4	1/4	6	12	20	80	30	0,10
RT470713		5/16	7	13	15	60	35	0,13
RT470813	5	5/16	8	13	15	60	40	0,11
RT470916	6	3/8	9	16	15	60	45	0,14
RT471220	8	1/2	12	20	10	40	50	0,24
RT471623	10	5/8	16	23	10	30	160	0,28
RT471927	12	3/4	19	27	10	30	190	0,38
RT472533	16	1"	25	33	10	30	250	0,50

The data provided is for guidance only and may be subject to changes or corrections without prior notice. Please contact us if you detect any errors or require further technical information. (Ficha generada el 02/04/2026 a las 08:10:07)

