


VISO HOSE (MILLIMETRES)

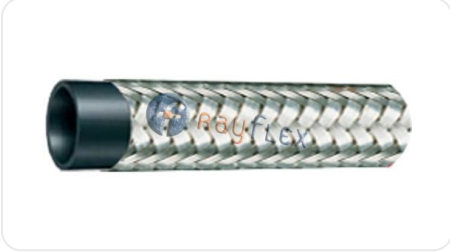

APPLICATIONS

Para gasolina, diésel, líquidos a base de minerales y glicoles, lubricantes, agua de refrigeración, aire comprimido, etc.

COVER

Acero galvanizado trenzado

MINIMUM TEMPERATURE

-35

INTERNAL CORE

Caucho NBR

MAXIMUM TEMPERATURE

90

Code	Referencia	Ø int mm	Ø ext mm	P.trabajo bar	P.rotura bar	Rad. curv. mm
RT460510	VISO	5	10	25	100	25
RT460612	VISO	6	12	25	100	30
RT460713	VISO	7	13	25	100	35
RT460814	VISO	8	14	25	100	40
RT460916	VISO	9	16	20	80	45
RT461220	VISO	12	20	20	80	50
RT461524	VISO	15	24	15	60	60
RT462029	VISO	20	29	10	40	85
RT462433	VISO	24	33	10	40	120
RT463040	VISO	30	40	6	20	300
RT464052	VISO	40	52	10	40	400
RT465062	VISO	50	62	10	40	500

Rayflex Sistemas y Fluidos S.A.
Pol. Ind. El Pla, C/Miquel Torelló i Pagès, 37-39, 08750 Molins de Rei, Barcelona
T. + 34 93 680 43 20 - info@rayflex.net

© Rayflex Todos los derechos reservados