


R7 TUBE TWIN

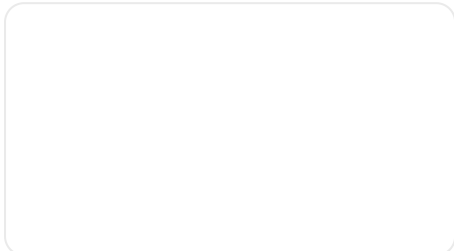

APPLICATIONS

Oleodinámica de media presión.

REINFORCEMENT

Una trenza de fibra de poliéster.

MAXIMUM TEMPERATURE

100

INTERNAL CORE

Poliéster termoplástico.

COVER

Cubierta de poliuretano.

MINIMUM TEMPERATURE

-40

Code	Galga	Ø int pulg	Ø int mm	Ø ext mm	P.trabajo bar	Protura bar	Rad. curv. mm	Peso kg/m
RT520403	3	3/16	4,8	10,0	210	840	30	0,15
RT520604	4	1/4	6,4	11,8	200	800	35	0,17
RT520805	5	5/16	8,0	14,3	190	760	45	0,26
RT521006	6	3/8	9,7	16,0	175	700	55	0,31
RT521208	8	1/2	13,0	20,3	140	560	75	0,45

The data provided is for guidance only and may be subject to changes or corrections without prior notice. Please contact us if you detect any errors or require further technical information. (Ficha generada el 02/04/2026 a las 12:06:06)