


# FH SERIES FLAT-FACES FEMALE QUICK COUPLING

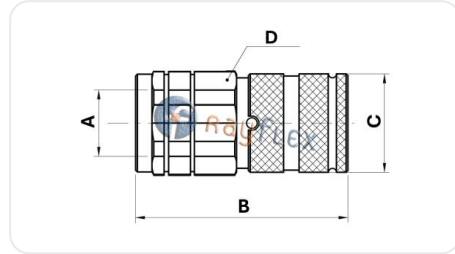

## STANDARD

ISO 16028

## MAXIMUM TEMPERATURE

110

## MINIMUM TEMPERATURE

-20

Code	Referencia	DN	A mm	B mm	C mm	D mm	P <sub>trab.máx</sub> bar
RE25070401	FHF06B04	6,3	1/4 BSPP	55,7	28	27	420
RE25090601	FHF10B06	10	3/8 BSPP	69	32	30	375
RE25090801	FHF10B08	10	1/2 BSPP	69	32	30	375
RE25130801	FHF13B08	12,5	1/2 BSPP	84	38	36	350
RE25131201	FHF13B12	12,5	3/4 BSPP	83,7	38	36	350
RE25151201	FHF16B12	16	3/4 BSPP	84	42	41	350
RE25171601	FHF19B16	19	1" BSPP	99	48	46	350
RE25212001	FHF25B20	25	1"1/4 BSPP	111,5	55	55	350
RE26090801	FHF10E08	10	3/4-16 UNF	69	32	30	375
RE26130801	FHF13E08	12,5	3/4-16 UNF	84	38	36	350
RE26131001	FHF13E10	12,5	7/8-14 UNF	84	38	36	350
RE26131201	FHF13E12	12,5	1"1/16-12 UNF	83,7	38	36	350
RE26151201	FHF16E12	16	1"1/16-12 UNF	84	42	41	350
RE26171601	FHF16E16	19	1"5/16-12 UNF	99	48	46	350

Rayflex Sistemas y Fluidos S.A.  
Pol. Ind. El Pla, C/Miquel Torelló i Pagès, 37-39, 08750 Molins de Rei, Barcelona  
T. + 34 93 680 43 20 - info@rayflex.net

© Rayflex Todos los derechos reservados