


FH SERIES FLAT-FACES MALE QUICK COUPLING

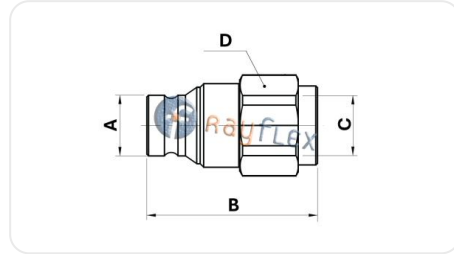

STANDARD

ISO 16028

MAXIMUM TEMPERATURE

110

MINIMUM TEMPERATURE

-20

Code	DN	A mm	B mm	C mm	D mm	P.trab.máx bar
RE25070402	6,3	16,2	52,2	1/4 BSPP	22	420
RE25090602	10	19,7	60	3/8 BSPP	30	375
RE25090802	10	19,7	60	1/2 BSPP	30	375
RE25130802	12,5	24,5	71,5	1/2 BSPP	36	350
RE25131202	12,5	24,5	71,5	3/4 BSPP	36	350
RE25151202	16	27	73	3/4 BSPP	36	350
RE25171602	19	30	84	1" BSPP	46	350
RE25212002	25	36	90	1"1/4 BSPP	55	350
RE26090802	10	19,7	60	3/4-16 UNF	30	375
RE26130802	12,5	24,5	71,5	3/4-16 UNF	36	350
RE26131002	12,5	24,5	71,5	7/8-14 UNF	36	350
RE26131202	12,5	24,5	71,5	1"1/16-12 UNF	36	350
RE26151202	16	27	73	1"1/16-12 UNF	36	350
RE26171602	19	30	84	1"5/16-12 UNF	46	350

Rayflex Sistemas y Fluidos S.A.
Pol. Ind. El Pla, C/Miquel Torelló i Pagès, 37-39, 08750 Molins de Rei, Barcelona
T. + 34 93 680 43 20 - info@rayflex.net

© Rayflex Todos los derechos reservados