
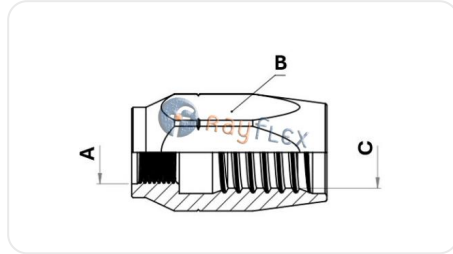


REUSABLE FERRULE FOR SAE 100 R1 - R2 HOSE

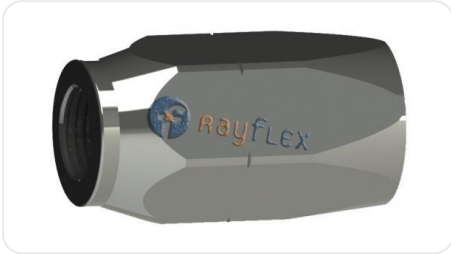

MATERIAL

Acero al carbono - zincado trivalente

WORKING PRESSURE

La presión de trabajo se reducirá al 10% de la declarada (SAE J517).

MAXIMUM TEMPERATURE

80

Code	A mm	B mm	C mm	Ø manguera pulg.
RR70530003	7x0,75	17	11	3/16
RR70530004	9x1	18	12,5	1/4
RR70530005	11x1	20	14	5/16
RR70530006	13x1	22	16,2	3/8
RR70530008	5/8 UNF	26	19,5	1/2
RR70530012	22x1,5	32	26,5	3/4
RR70530016	1"3/16	42	34,5	1"
RR70540004	9x1	19	14	1/4
RR70540005	11x1	22	15	5/16
RR70540006	13x1	24	17,5	3/8
RR70540008	5/8 UNF	27	20	1/2
RR70540012	22x1,5	34	27,5	3/4
RR70540016	1"3/16	45	36,5	1"

Rayflex Sistemas y Fluidos S.A.
Pol. Ind. El Pla, C/Miquel Torelló i Pagès, 37-39, 08750 Molins de Rei, Barcelona
T. + 34 93 680 43 20 - info@rayflex.net

© Rayflex Todos los derechos reservados