
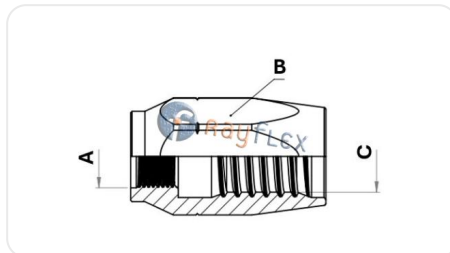


REUSABLE FERRULE FOR SAE 100 R5 HOSE

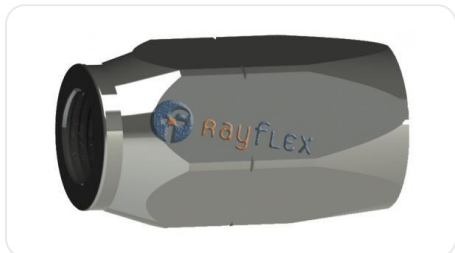

MATERIAL

Acero al carbono - zincado trivalente

WORKING PRESSURE

La presión de trabajo se reducirá al 10% de la declarada (SAE J517).

MAXIMUM TEMPERATURE

80

Code	A mm	B mm	C mm	Ø manguera pulg.
RR70550003	7x0,75	17	11,5	3/16
RR70550004	9x1	18	13,5	1/4
RR70550005	11x1	20	15,5	5/16
RR70550006	13x1	22	17,5	3/8

The data provided is for guidance only and may be subject to changes or corrections without prior notice. Please contact us if you detect any errors or require further technical information. (Ficha generada el 18/06/2026 a las 01:27:31)