
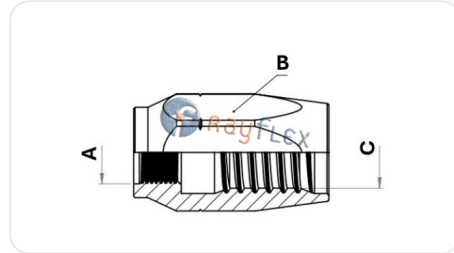


REUSABLE FERRULE FOR THERMOPLASTIC HOSE

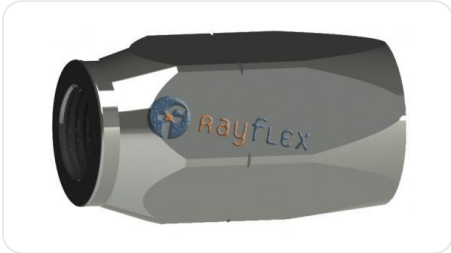

MATERIAL

Acero al carbono - zincado trivalente

WORKING PRESSURE

La presión de trabajo se reducirá al 10% de la declarada (SAE J517).

MAXIMUM TEMPERATURE

80

Code	A mm	B mm	C mm	Ø manguera pulg.
RR00570002	6x0,75	12	7,5	5/32
RR00570003	7x0,75	14	9,5	3/16
RR00570004	9x1	17	11,4	1/4
RR00570005	11x1	19	13,6	5/16
RR00570006	13x1	22	15,2	3/8
RR00570008	5/8 UNF	24	19,2	1/2
RR00580004	9x1	17	10,8	1/4
RR00580005	11x1	19	13	5/16
RR00580006	13x1	20	14,2	3/8

The data provided is for guidance only and may be subject to changes or corrections without prior notice. Please contact us if you detect any errors or require further technical information. (Ficha generada el 18/06/2026 a las 01:26:50)