


# 2-WAY BALL VALVE PN25

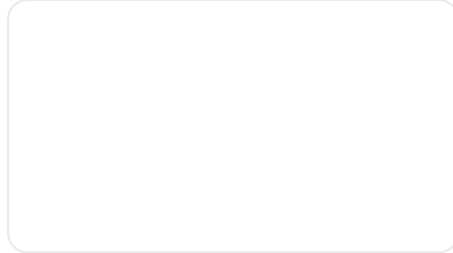

## MATERIAL

Fabricada en Latón CW617N según UNE-EN 12165

## MAXIMUM WORKING PRESSURE

25

## MAXIMUM TEMPERATURE

110

## MINIMUM TEMPERATURE

10

Code	Rosca	A mm	B mm	C mm	D mm
NV302904	1/4	9,5	40	81	40,4
NV302906	3/8	10	40	81	40,4
NV302908	1/2	15	46	90	53
NV302912	3/4	18	51	100	56
NV302916	1"	22	58	110	60
NV302920	1"1/4	28	72	140	75
NV302924	1"1/2	35	81	140	78
NV302932	2"	44	96	162	90
NV302940	2"1/2	57	124	236	108
NV302948	3"	68	139	236	116
NV302964	4"	85	166	236	128

The data provided is for guidance only and may be subject to changes or corrections without prior notice. Please contact us if you detect any errors or require further technical information. (Ficha generada el 18/06/2026 a las 08:46:41)

Rayflex Sistemas y Fluidos S.A.  
Pol. Ind. El Pla, C/Miquel Torelló i Pagès, 37-39, 08750 Molins de Rei, Barcelona  
T. + 34 93 680 43 20 - info@rayflex.net

© Rayflex Todos los derechos reservados