


# HYDROCARBON DELIVERY HOSE - 10 BAR

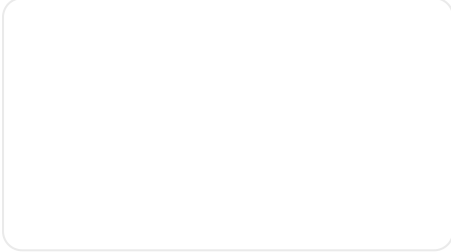

## APPLICATIONS

Impulsión de aceites y gasóleo.

## REINFORCEMENT

Trenza téxtil de gran tenacidad.

## WORKING PRESSURE

10

## MINIMUM TEMPERATURE

-30

## INTERNAL CORE

NBR conductivo negro.

## COVER

CR conductivo negro.

## MAXIMUM TEMPERATURE

80

Code	Ø int pulg	Ø int mm	Ø ext mm	Peso kg/m
TA650AA019	3/4	19	29	0,470
TA650AA025	1"	25	35	0,580
TA650AA032	1"1/4	32	42	0,710
TA650AA038	1"1/2	38	48	0,840
TA650AA040	1"9/16	40	50	
TA650AA051	2"	51	61	1,110
TA650AA063	2"1/2	63	75	1,630
TA650AA076	3"	76	88	1,960

The data provided is for guidance only and may be subject to changes or corrections without prior notice. Please contact us if you detect any errors or require further technical information. (Ficha generada el 02/04/2026 a las 08:06:40)