


SAND BLASTING HOSE - 12 BAR

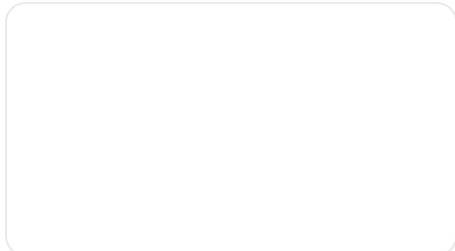

APPLICATIONS

Chorro con material abrasivo.

INTERNAL CORE

NR negro conductivo. Resistente a la abrasión 50mm3.

COVER

SBR/NR negro. Resistente a la abrasión y ozono.

MAXIMUM TEMPERATURE

80

STANDARD

ISO 4649/A

REINFORCEMENT

Trenza textil de alta resistencia.

WORKING PRESSURE

12 bar

MINIMUM TEMPERATURE

-40

| Code | Ø int pulg | Ø int mm | Ø ext mm | Peso kg/m |
|------------|---------------|-------------|-------------|--------------|
| TA753AA019 | 3/4 | 19 | 33 | 0,700 |
| TA753AA025 | 1" | 25 | 39 | 0,860 |
| TA753AA051 | 2" | 51 | 71 | 2,380 |

The data provided is for guidance only and may be subject to changes or corrections without prior notice. Please contact us if you detect any errors or require further technical information. (Ficha generada el 02/04/2026 a las 12:05:33)