


ENCH. RÁPIDO HEMBRA CARAS PLANAS SERIE FH

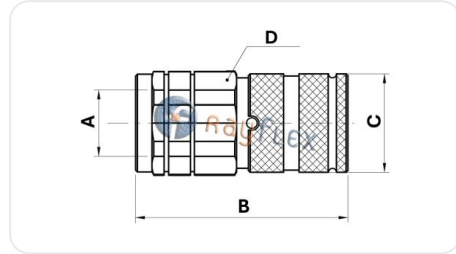

NORMATIVA
ISO 16028

TEMPERATURA MÁXIMA
110

TEMPERATURA MÍNIMA
-20

Código	DN	A mm	B mm	C mm	D mm	P.trab.máx bar
RE25070401	6,3	1/4 BSPP	55,7	28	27	420
RE25090601	10	3/8 BSPP	69	32	30	375
RE25090801	10	1/2 BSPP	69	32	30	375
RE25130801	12,5	1/2 BSPP	84	38	36	350
RE25131201	12,5	3/4 BSPP	83,7	38	36	350
RE25151201	16	3/4 BSPP	84	42	41	350
RE25171601	19	1" BSPP	99	48	46	350
RE25212001	25	1"1/4 BSPP	111,5	55	55	350
RE26090801	10	3/4-16 UNF	69	32	30	375
RE26130801	12,5	3/4-16 UNF	84	38	36	350
RE26131001	12,5	7/8-14 UNF	84	38	36	350
RE26131201	12,5	1"1/16-12 UNF	83,7	38	36	350
RE26151201	16	1"1/16-12 UNF	84	42	41	350
RE26171601	19	1"5/16-12 UNF	99	48	46	350

Rayflex Sistemas y Fluidos S.A.
Pol. Ind. El Pla, C/Miquel Torelló i Pagès, 37-39, 08750 Molins de Rei, Barcelona
T. + 34 93 680 43 20 - info@rayflex.net

© Rayflex Todos los derechos reservados