


ENCH. RÁPIDO MACHO CARAS PLANAS SERIE FH

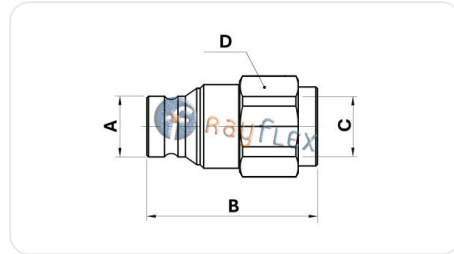

NORMATIVA
ISO 16028

TEMPERATURA MÁXIMA
110

TEMPERATURA MÍNIMA
-20

Código	Referencia	DN	A mm	B mm	C mm	D mm	P _{trab.máx} bar
RE25070402	FHM06B04	6,3	16,2	52,2	1/4 BSPP	22	420
RE25090602	FHM10B06	10	19,7	60	3/8 BSPP	30	375
RE25090802	FHM10B08	10	19,7	60	1/2 BSPP	30	375
RE25130802	FHM13B08	12,5	24,5	71,5	1/2 BSPP	36	350
RE25131202	FHM13B12	12,5	24,5	71,5	3/4 BSPP	36	350
RE25151202	FHM16B12	16	27	73	3/4 BSPP	36	350
RE25171602	FHM19B16	19	30	84	1" BSPP	46	350
RE25212002	FHM25B20	25	36	90	1"1/4 BSPP	55	350
RE26090802	FHM10E08	10	19,7	60	3/4-16 UNF	30	375
RE26130802	FHM13E08	12,5	24,5	71,5	3/4-16 UNF	36	350
RE26131002	FHM13E10	12,5	24,5	71,5	7/8-14 UNF	36	350
RE26131202	FHM13E12	12,5	24,5	71,5	1"1/16-12 UNF	36	350
RE26151202	FHM16E12	16	27	73	1"1/16-12 UNF	36	350
RE26171602	FHM16E16	19	30	84	1"5/16-12 UNF	46	350

Rayflex Sistemas y Fluidos S.A.
Pol. Ind. El Pla, C/Miquel Torelló i Pagès, 37-39, 08750 Molins de Rei, Barcelona
T. + 34 93 680 43 20 - info@rayflex.net

© Rayflex Todos los derechos reservados