



ENCH. RÁPIDO MACHO CARAS PLANAS SERIE FH

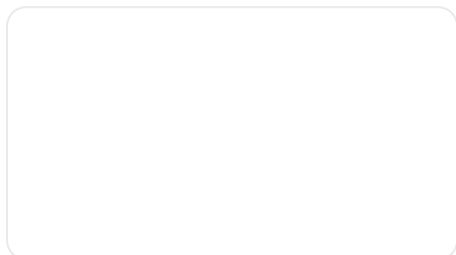

NORMATIVA

ISO 16028

TEMPERATURA MÁXIMA

110

TEMPERATURA MÍNIMA

-20

| Código | Referencia | DN | A mm | B mm | C mm | D mm | P.trab.máx bar |
|------------|------------|------|------|------|---------------|------|----------------|
| RE25070402 | FHM06B04 | 6,3 | 16,2 | 52,2 | 1/4 BSPP | 22 | 420 |
| RE25090602 | FHM10B06 | 10 | 19,7 | 60 | 3/8 BSPP | 30 | 375 |
| RE25090802 | FHM10B08 | 10 | 19,7 | 60 | 1/2 BSPP | 30 | 375 |
| RE25130802 | FHM13B08 | 12,5 | 24,5 | 71,5 | 1/2 BSPP | 36 | 350 |
| RE25131202 | FHM13B12 | 12,5 | 24,5 | 71,5 | 3/4 BSPP | 36 | 350 |
| RE25151202 | FHM16B12 | 16 | 27 | 73 | 3/4 BSPP | 36 | 350 |
| RE25171602 | FHM19B16 | 19 | 30 | 84 | 1" BSPP | 46 | 350 |
| RE25212002 | FHM25B20 | 25 | 36 | 90 | 1"1/4 BSPP | 55 | 350 |
| RE26090802 | FHM10E08 | 10 | 19,7 | 60 | 3/4-16 UNF | 30 | 375 |
| RE26130802 | FHM13E08 | 12,5 | 24,5 | 71,5 | 3/4-16 UNF | 36 | 350 |
| RE26131002 | FHM13E10 | 12,5 | 24,5 | 71,5 | 7/8-14 UNF | 36 | 350 |
| RE26131202 | FHM13E12 | 12,5 | 24,5 | 71,5 | 1"1/16-12 UNF | 36 | 350 |
| RE26151202 | FHM16E12 | 16 | 27 | 73 | 1"1/16-12 UNF | 36 | 350 |
| RE26171602 | FHM16E16 | 19 | 30 | 84 | 1"5/16-12 UNF | 46 | 350 |

Rayflex Sistemas y Fluidos S.A.
Pol. Ind. El Pla, C/Miquel Torelló i Pagès, 37-39, 08750 Molins de Rei, Barcelona
T. + 34 93 680 43 20 - info@rayflex.net

© Rayflex Todos los derechos reservados