


BSPB MALE-MALE ADAPTER STAINLESS STEEL

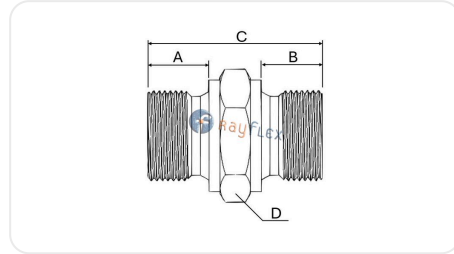

STANDARD

BSI 5200 - ISO 8434-6

Code	Rosca	Rosca	A mm	B mm	C mm	D mm	P.trabajo bar
XRB60180202	1/8	1/8	8	8	25	14	400
XRB60180204	1/8	1/4			29	19	400
XRB60180404	1/4	1/4	11	11	32	19	400
XRB60180406	1/4	3/8			34	27	400
XRB60180408	1/4	1/2			36	27	350
XRB60180412	1/4	3/4			40	32	315
XRB60180606	3/8	3/8	12	12	35	27	400
XRB60180608	3/8	1/2			38	27	350
XRB60180612	3/8	3/4			40	32	315
XRB60180616	3/8	1"			46	41	250
XRB60180808	1/2	1/2	14	14	39	27	315
XRB60180812	1/2	3/4			43	32	315
XRB60180816	1/2	1"			48	41	250
XRB60181212	3/4	3/4	16	16	45	32	315
XRB60181216	3/4	1"			50	41	250
XRB60181616	1"	1"	19	19	53	41	250
XRB60181620	1"	1"1/4			55	50	220
XRB60181624	1"	1"1/2			56	55	170

Code	Rosca	Rosca	A mm	B mm	C mm	D mm	Ptrabajo bar
XRB60181632	1"	2"			61,5	70	125
XRB60182020	1"1/4	1"1/4	20	20	55	50	220
XRB60182024	1"1/4	1"1/2			56	55	170
XRB60182032	1"1/4	2"			60,5	70	125
XRB60182424	1"1/2	1"1/2	20	20	56	55	170
XRB60182432	1"1/2	2"			63	70	125
XRB60183232	2"	2"	24,5	24,5	66,5	70	125
XRB60184040	2"1/2	2"1/2	26	26	69,5	80	70
XRB60184848	3"	3"	26	26	69,5	100	70

The data provided is for guidance only and may be subject to changes or corrections without prior notice. Please contact us if you detect any errors or require further technical information. (Ficha generada el 19/06/2026 a las 09:40:28)

Rayflex Sistemas y Fluidos S.A.
 Pol. Ind. El Pla, C/Miquel Torelló i Pagès, 37-39, 08750 Molins de Rei, Barcelona
 T. + 34 93 680 43 20 - info@rayflex.net

© Rayflex Todos los derechos reservados